

## FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 270g only
- Efficiency 84%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C




## SPECIFICATION

| Model                   |              |
|-------------------------|--------------|
| Item                    | *A2-36S12    |
| Output Voltage          | 12V          |
| Output Rating           | 3.0A         |
| Input Voltage           | AC 90~264V   |
| Input Frequency         | 47~63Hz      |
| Input Current           | 1.2A Maximum |
| Inrush Current          | 60A Maximum  |
| Line Regulation         | 2% Maximum   |
| Load Regulation         | ±5%          |
| Ripple & Noise          | 1% Maximum   |
| Efficiency              | 84% Typical  |
| Temperature Coefficient | 0.05%/°C     |
| Over-Voltage Protection | 24V Maximum  |
| Operating Temperature   | 0~40°C       |
| Storage Temperature     | -20~85°C     |
| Safety Description      | ---          |

(\*) : Under Development (I/P) : In Process


Above specification is for reference only, please contact for details.

## ORDERING INFORMATION

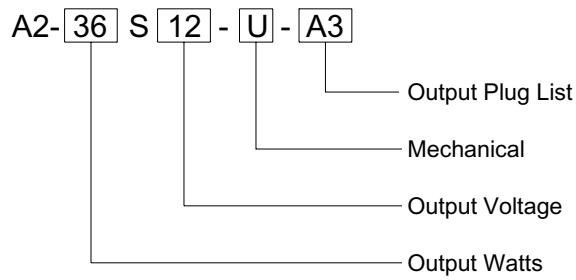


## MECHANICAL



**U**



**V**



**W**

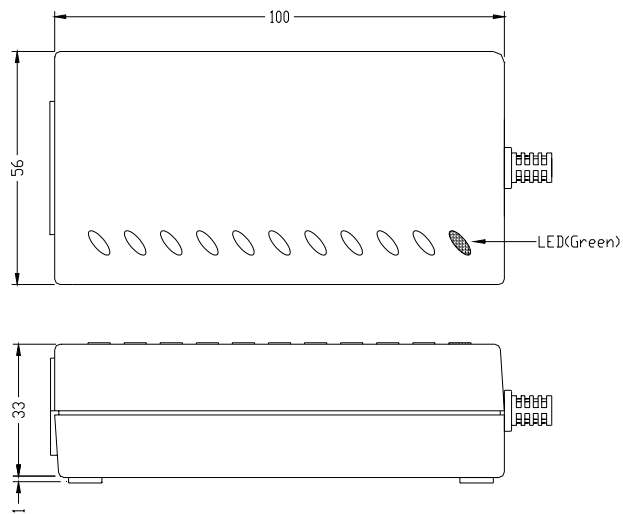

Unit: m.m.

Standard Output Cable:  
18AWG, UL SPT-1, 1200mm



**Touch Electronic Co., Ltd.**

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: [touch001@ms25.hinet.net](mailto:touch001@ms25.hinet.net) Overseas Contact e-mail: [sales@metouch.com](mailto:sales@metouch.com) <http://www.metouch.com>