

## FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Compact Size: (L)120\*(W)60\*(H)34mm
- Efficiency Over 75%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- IEC-320 Receptacle 3P




## SPECIFICATION

| Model<br>Item           | EA1050E-xx                                                | EA1050F-xx      | EA1050G-xx      |
|-------------------------|-----------------------------------------------------------|-----------------|-----------------|
| Output Voltage          | +12V~17V                                                  | +12V~17V        | +12V~17V        |
| Output Rating           | 3.5A or 42W Max                                           | 3.0A or 36W Max | 2.5A or 30W Max |
| Input Voltage           | AC 90~264V                                                |                 |                 |
| Input Frequency         | 47~63Hz                                                   |                 |                 |
| Input Current           | 1.5A Maximum                                              |                 |                 |
| Inrush Current          | 80A Maximum                                               |                 |                 |
| Line Regulation         | 2% Maximum                                                |                 |                 |
| Load Regulation         | ±5%                                                       |                 |                 |
| Ripple & Noise          | 1% Typical                                                |                 |                 |
| Efficiency              | 77% Typical                                               |                 |                 |
| Temperature Coefficient | 0.05%/                                                    |                 |                 |
| Over-Voltage Protection | 16V~20V Maximum                                           |                 |                 |
| Operating Temperature   | 0~40                                                      |                 |                 |
| Storage Temperature     | -20~85                                                    |                 |                 |
| Safety Description      | UL, CUL, TUV, CE, PSE, D.F.N.S., CB, FCC, BSMI, CCIB, KTL |                 |                 |


(\*) : Under Development

(I/P): In Process

## ORDERING INFORMATION

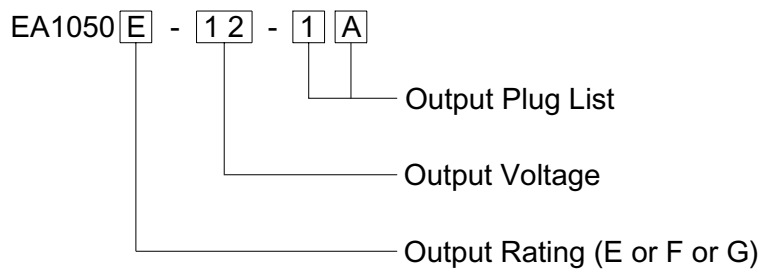

## MECHANICAL

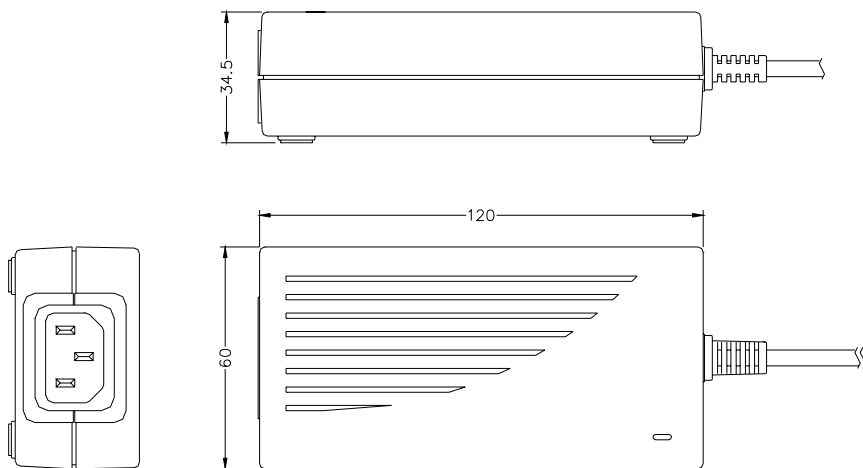

Unit: m.m.

Standard Output Cable:  
18AWG, UL SPT-1, 1200mm, EMI CORE.



Touch Electronic Co., Ltd.