

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Compact Size
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- IEC-320 Receptacle 2P



SPECIFICATION

Item	Model	EA2015A	EA2015B
Input Voltage		AC 90~264V	
Input Frequency		47~63Hz	
Input Current		0.5A Maximum	
Inrush Current		50A Maximum	
Efficiency		60% Typical	
Temperature Coefficient		0.05%/°C	
Hold-Up Time		10ms Minimum	
Over-Voltage Protection		7.0V Maximum (5V Output)	
Operating Temperature		0~40°C	
Storage Temperature		-20~85°C	
Weight		200g/7.2oz	
Safety Description		UL, CUL, TUV, CE	

(*) : Under Development (I/P) : In Process

Above specification is for reference only, please contact for details.


ORDERING INFORMATION

EA2015 **A** - **D3**

Output Plug List

Outputs (A or B)

MECHANICAL

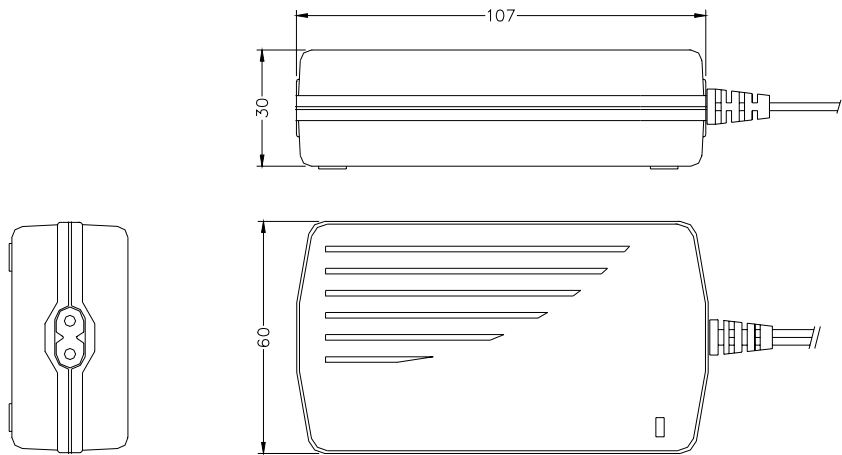

Unit: m.m.

OUTPUTS

Model No.	Vo	Load			Regulation		Tolerance	Ripple & Noise
		Min.	Rated	Surge	Line	Load		
EA2015A	Vo1 +3.3V	0.0A	2.5A	---	1.0%	6.0%	± 6.0%	50mV
	Vo2 +5V	0.0A	1.0A	---	1.0%	5.0%	± 5.0%	60mV
EA2015B	Vo1 +5V	0.0A	1.5A	---	1.0%	5.0%	± 5.0%	60mV
	Vo2 +12V	0.0A	0.5A	---	1.0%	5.0%	± 5.0%	120mV

Standard Output Cable:
20AWG, UL 2464/3C/Shielding, 1200mm



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>