

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Compact Size
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- IEC-320 Receptacle 2P



SPECIFICATION

Model	EA30273
Item	
Output Voltage	+5V; +12V; -12V
Output Rating	+5V 2.5A~3A; +12V 1A~1.5A ; -12V 0.2A (Max 30W)
Input Voltage	AC 90~264V
Input Frequency	47~63Hz
Input Current	0.5A Maximum
Inrush Current	50A Maximum
Line Regulation	2% Maximum
Efficiency	75% Typical
Hold-Up Time	10ms Minimum
Over-Voltage Protection	7.0V Maximum (5V Output)
Operating Temperature	0~40
Storage Temperature	-20~85
Safety Description	UL, CUL, TUV, CE, PSE

(*): Under Development

(I/P): In Process

MECHANICAL

Fig. Blank







Fig. 3

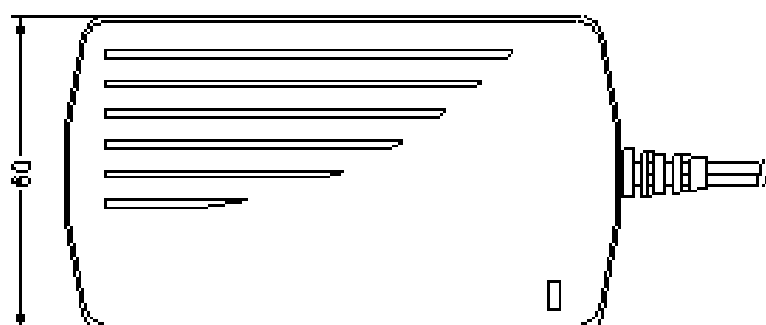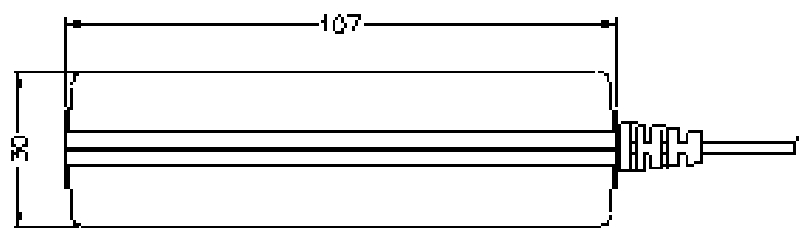

Unit: mm.