

FEATURES

- Vcci'B', Fcc'B' Compliance
- Light Weight: 110g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C




SPECIFICATION

Model Item	M1-7S03	M1-8S05	M1-10S05	M1-12S05	M1-15S05
Output Voltage	3.3V	5V	5V	5V	5V
Output Current	2.0A	1.6A	2.0A	2.5A	3.0A
Input Voltage	AC 90~132V				
Input Frequency	47~63Hz				
Input Current	0.3A Maximum			0.5A Maximum	
Inrush Current	30A Maximum				
Line Regulation	2% Maximum				
Load Regulation	±5%				
Ripple & Noise	50mV Maximum				
Efficiency	70% Typical	72% Typical	74% Typical	76% Typical	
Temperature Coefficient	0.05%/°C				
Over-Voltage Protection	7V Maximum	10V Maximum	10V Maximum	10V Maximum	
Operating Temperature	0~40°C				
Storage Temperature	-20~85°C				
Safety Description	UL, CUL, BSMI, PSE				


(*) : Under Development (I/P) : In Process

Above specification is for reference only, please contact for details.

ORDERING INFORMATION

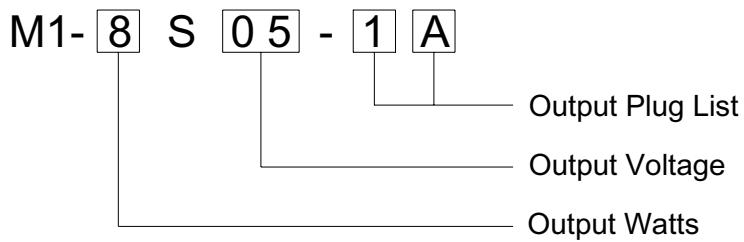

MECHANICAL

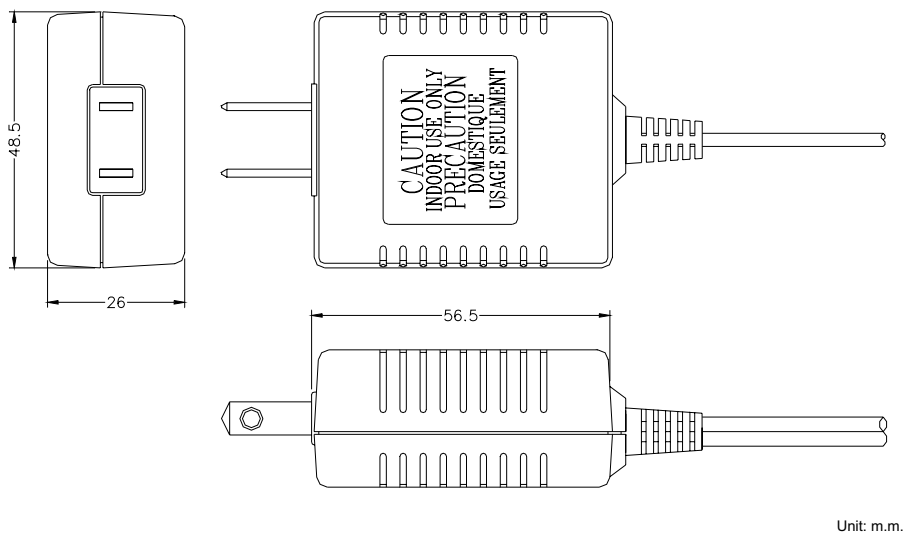

Standard Output Cable:
M1-8S05: 20AWG, UL 2468, 1800mm.
Others: 18AWG, UL SPT-1, 1800mm.



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>