

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 160g only
- Efficiency 71%~82%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



SPECIFICATION

Model	M2-12US05~07	M2-15US07~09	M2-15US09~12	M2-15US12~17	*M2-18US17~24
Item					
Output Voltage	5V~7V	7V~9V	9V~12V	12V~17V	17~24V
Output Power	12.5W	15W	15W	15W	18W
Input Voltage	AC 90~264V				
Input Frequency	47~63Hz				
Input Current	0.6A Maximum				
Inrush Current	50A Maximum				
Line Regulation	2% Maximum				
Load Regulation	±5%				
Ripple & Noise	1% Maximum				
Efficiency	71%~82% Typical				
Temperature Coefficient	0.05%/°C				
Over-Voltage Protection	200% Maximum				
Operating Temperature	0~40°C				
Storage Temperature	-20~85°C				
Safety Description	Fig. A	UL, CUL, BSMI, PSE, CB			---
	Fig. B	---			---
	Fig. C	BSMI			---
	Fig. D	TUV, BSMI, CB			---

(*) : Under Development (I/P) : In Process


Above specification is for reference only, please contact for details.

ORDERING INFORMATION

M2- 15 US 055 - A - 1 A

Output Plug List
Mechanical
Output Voltage
Output Watts

MECHANICAL

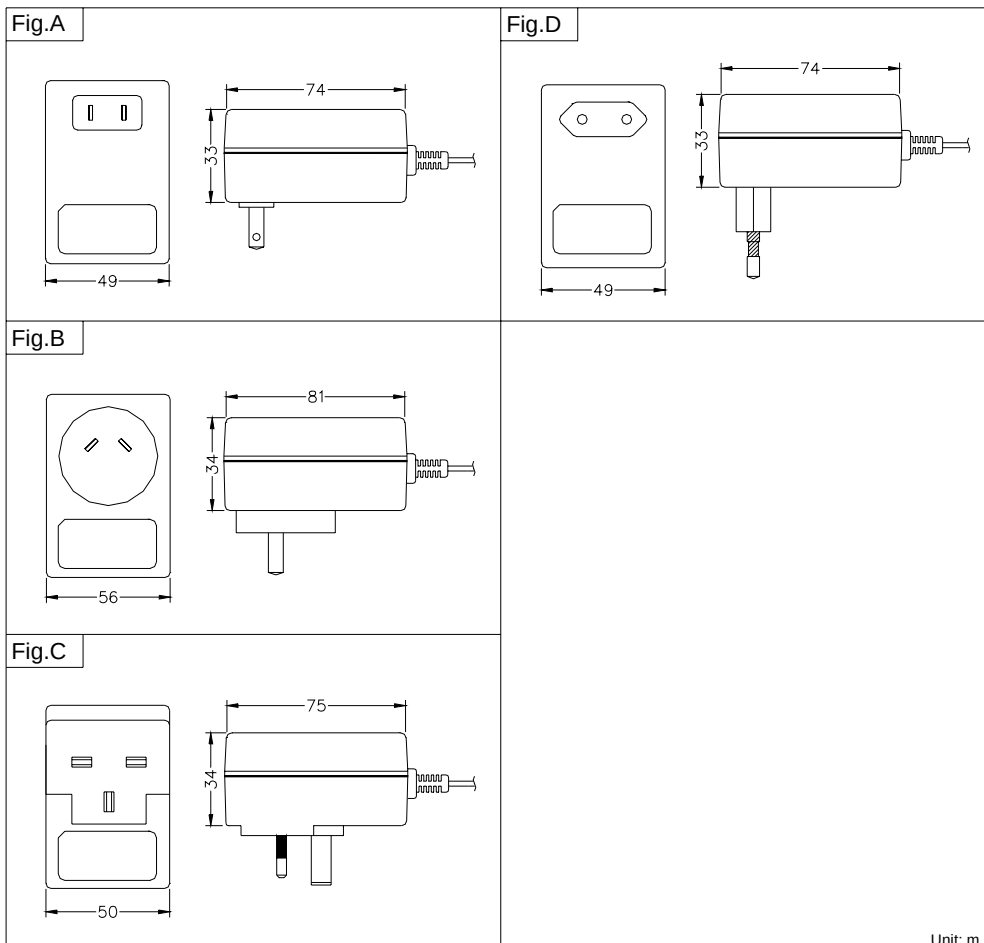

Unit: m.m.

Standard Output Cable:
5V~7V: 18AWG, UL SPT-1, 1800mm
8V~24V: 20AWG, UL 2468, 1800mm



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>