

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 140g only
- Efficiency 71%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



SPECIFICATION

Model Item	M2-10US05		M2-12US05		M2-15US05	
Output Voltage	5V		5V		5V	
Output Current	2.0A		2.5A		3.0A	
Input Voltage	AC 90~264V					
Input Frequency	47~63Hz					
Input Current	0.6A Maximum					
Inrush Current	50A Maximum					
Line Regulation	2% Maximum					
Load Regulation	±5%					
Ripple & Noise	1% Maximum					
Efficiency	71% Typical					
Temperature Coefficient	0.05%/°C					
Over-Voltage Protection	10V Maximum					
Operating Temperature	0~40°C					
Storage Temperature	-20~85°C					
Safety Description	Fig. A	UL(LPS), CUL, BSMI, PSE, CE		Fig. F	CCC, CE	
	Fig. B	DOIR, C-Tick, CE		Fig. I	CCC, CE	
	Fig. C	BSI, BSMI, CE		Fig. J	DOIR, CE	
	Fig. D	TUV(LPS), B-Mark, BSMI, CE		Fig. All	CB Report	

(*) : Under Development

(I/P) : In Process


Above specification is for reference only, please contact for details.

ORDERING INFORMATION

M2- 15 US 05 - A - 1 A

Output Plug List
Mechanical
Output Voltage
Output Watts

MECHANICAL

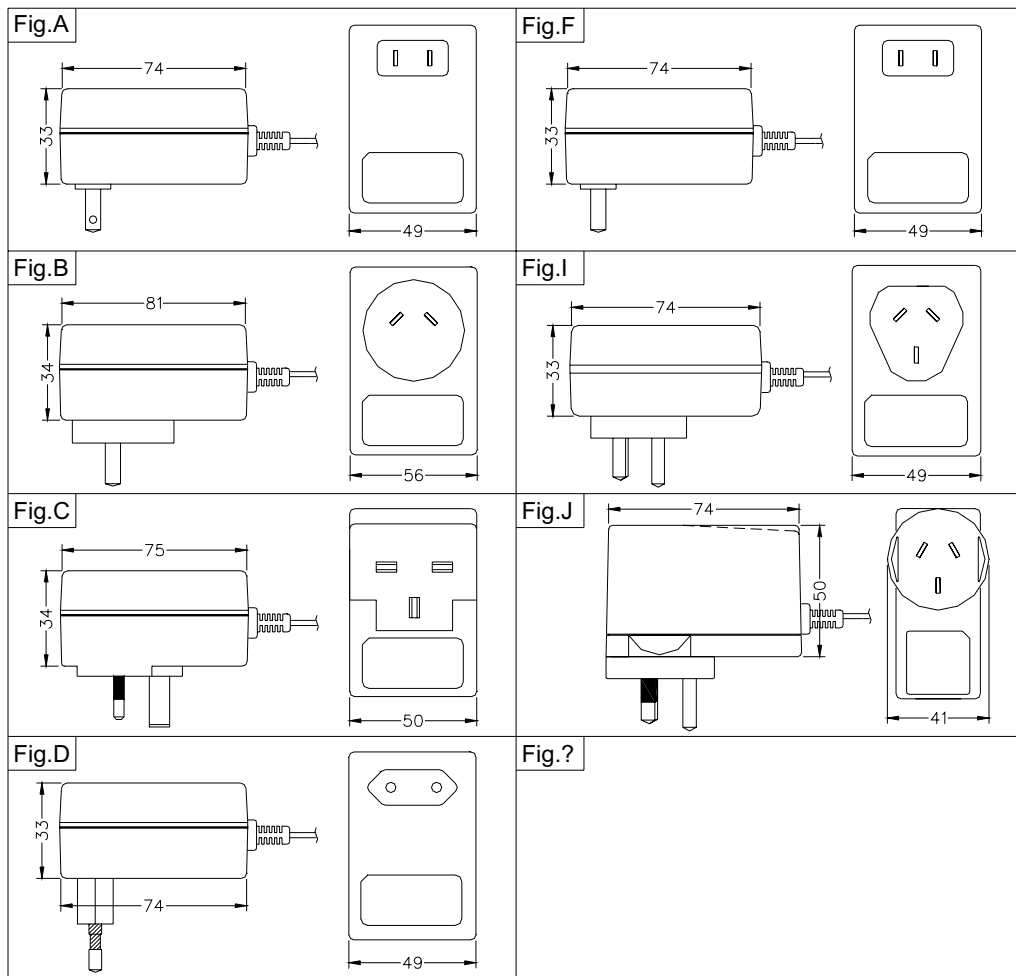

Unit: m.m.

Standard Output Cable:
18AWG, UL SPT-1, 1800mm



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>