

FEATURES

- VCCI' B', FCC' B' Compliance
- Light Weight: 90g only
- Efficiency 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



SPECIFICATION

Model	M3-5S03	M3-5S033	M3-5S05
Item			
Output Voltage	3V	3.3V	5V
Output Current	1.5A	1.5A	1A
Input Voltage	AC 90~132V		
Input Frequency	47~63Hz		
Input Current	0.2A Maximum		
Inrush Current	30A Maximum		
Line Regulation	2% Maximum		
Load Regulation	±7%	±6%	±5%
Ripple & Noise	50mV Maximum		
Efficiency	70% Typical		
Temperature Coefficient	0.05%/°C		
Over-Voltage Protection	10V Maximum		
Operating Temperature	0~40°C		
Storage Temperature	-20~85°C		
Safety Description	UL, BSMI		

(*) : Under Development (I/P) : In Process


Above specification is for reference only, please contact for details.

ORDERING INFORMATION

M3- **5** S **05** - **1** **A**

Output Plug List
Output Voltage
Output Watts

MECHANICAL

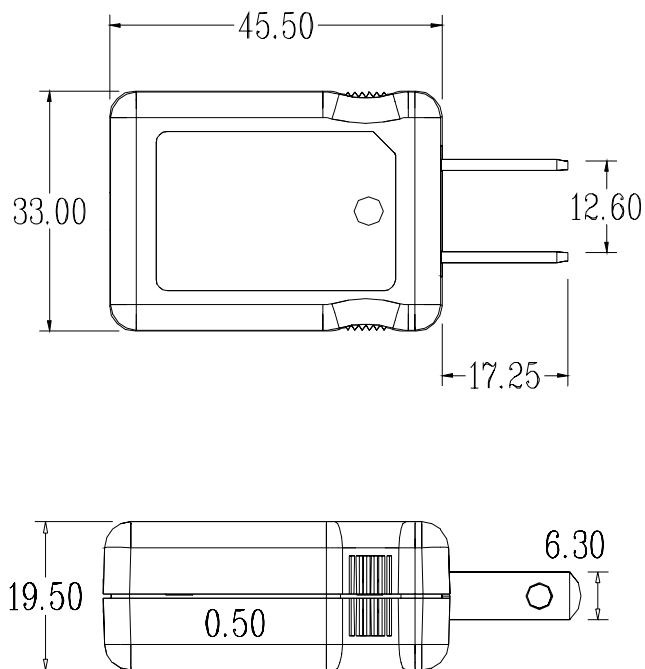

Unit: m.m.

Standard Output Cable:
3V, 3.3V: 20AWG, UL2468, 1200mm
5V: 22AWG, UL 2468, 1800mm



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>