


FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 90g only
- Efficiency 66%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C

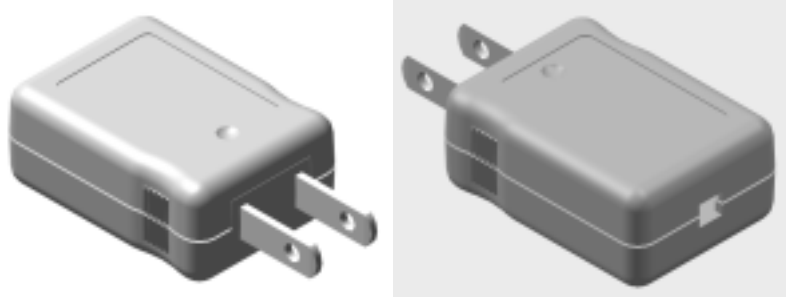


SPECIFICATION

Model	M3-5US05
Item	
Output Voltage	5V
Output Current	1A
Input Voltage	AC 90~264V
Input Frequency	47~63Hz
Input Current	0.2A Maximum
Inrush Current	30A Maximum
Line Regulation	2% Maximum
Load Regulation	±5%
Ripple & Noise	50mV Maximum
Efficiency	66% Typical
Temperature Coefficient	0.05%/°C
Over-Voltage Protection	10V Maximum
Operating Temperature	0~40°C
Storage Temperature	-20~85°C
Safety Description	---


(*) : Under Development (I/P) : In Process

Above specification is for reference only, please contact for details.

ORDERING INFORMATION

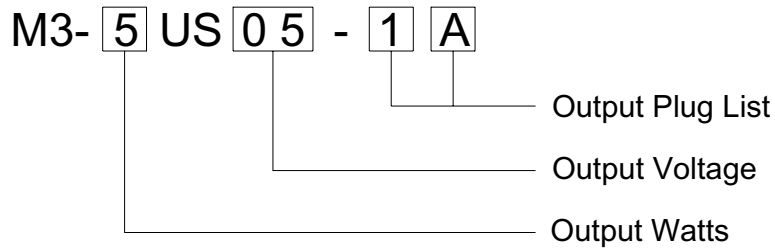

MECHANICAL

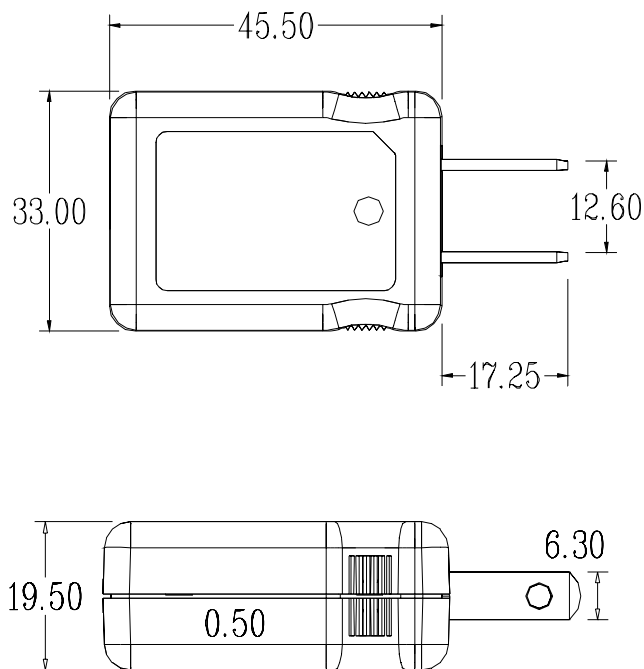

Unit: m.m.

Standard Output Cable:
5V: 22AWG, UL 2468, 1800mm



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>