


FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 80g only
- Constant Current For Cell Phone
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C

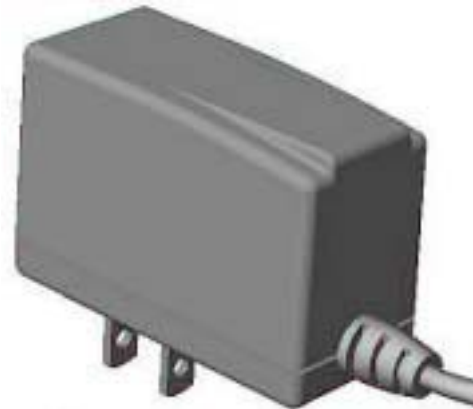

SPECIFICATION

Item	Model	
	M6-3US05~07	M6-6US05~07
Output Voltage	+5V~7V	+5V~7V
Output Rating	3W Max	6W Max
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	0.2A Maximum	
Inrush Current	30A Maximum	
Line Regulation	2% Maximum	
Load Regulation	±5%	
Ripple & Noise	1% Maximum	
Efficiency	60% Typical	66% Typical
Temperature Coefficient	0.05%/°C	
Over-Voltage Protection	150% Maximum	
Operating Temperature	0~40°C	
Storage Temperature	-20~85°C	
Safety Description	Fig. A	I/P
	Fig. B	---
	Fig. C	---
	Fig. D	I/P

(*) : Under Development (I/P) : In Process


Above specification is for reference only, please contact for details.

Touch Electronic Co., Ltd.


Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>

ORDERING INFORMATION

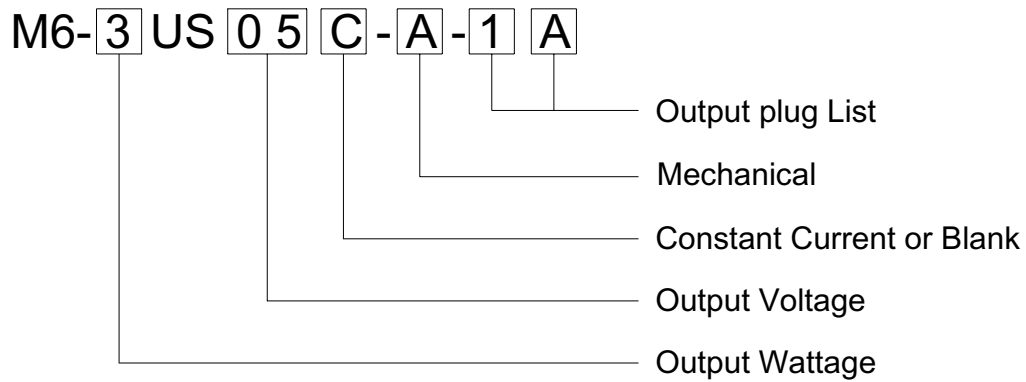

MECHANICAL

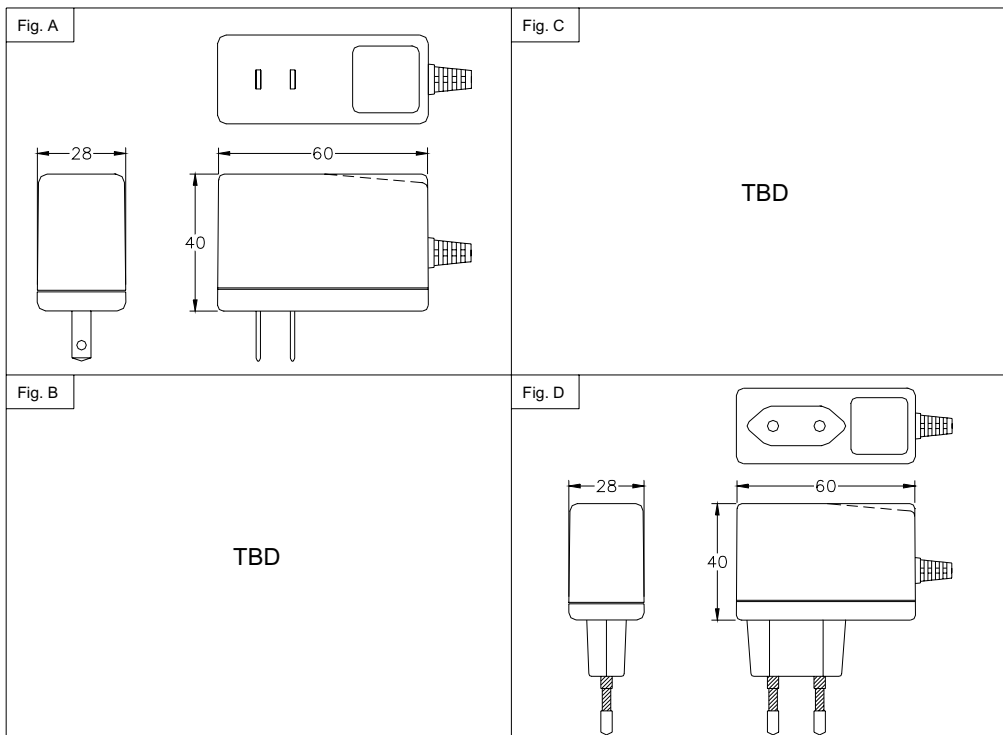

Unit: m.m.

Standard Output Cable:
 3W: 22AWG, UL 2468, 1800mm.
 6W: 20AWG, UL 2468, 1800mm.



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>