

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 110g only
- Efficiency 62%~74%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0 ~40



SPECIFICATION

Model	SA0104~07	SA013V3	SA013V6	SA0105	SA0106	SA0109	SA0112
Item							
Output Voltage	+4V~7V	+3.3V	+3.6V	+5V	+6V	+9V	+12V
Output Rating	6W Max	1.5A	1.2A	1.4A	1.2A	0.8A	0.6A
Input Voltage	AC 90~264V						
Input Frequency	47~63Hz						
Input Current	0.3A Maximum						
Inrush Current	30A Maximum						
Line Regulation	2% Maximum						
Load Regulation	±5%						
Ripple & Noise	1% Maximum						
Efficiency	67% Typical	62% Typical	62% Typical	67% Typical	69% Typical	72% Typical	74% Typical
Temperature Coefficient	0.05%/						
Over-Voltage Protection	8V~14V Maximum	7V Maximum	7V Maximum	10V Maximum	12V Maximum	18V Maximum	24V Maximum
Operating Temperature	0~40						
Storage Temperature	-20~85						
Safety Description	Fig. A	UL, CUL, CB, LPS, CE, BSMI, PSE					
	Fig. B	CE					
	Fig. C	BSI, LPS, CE, BSMI					
	Fig. D	TUV, CB, LPS, CE, BSMI					
	Fig. F	CCC, CB, LPS, CE, BSMI					

(*) : Under Development (I/P) : In Process

Above specification is for reference only, please contact for details.

Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161


Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>

ORDERING INFORMATION

SA01 05 - A - 1 A

Output plug List
Mechanical
Output Voltage

MECHANICAL

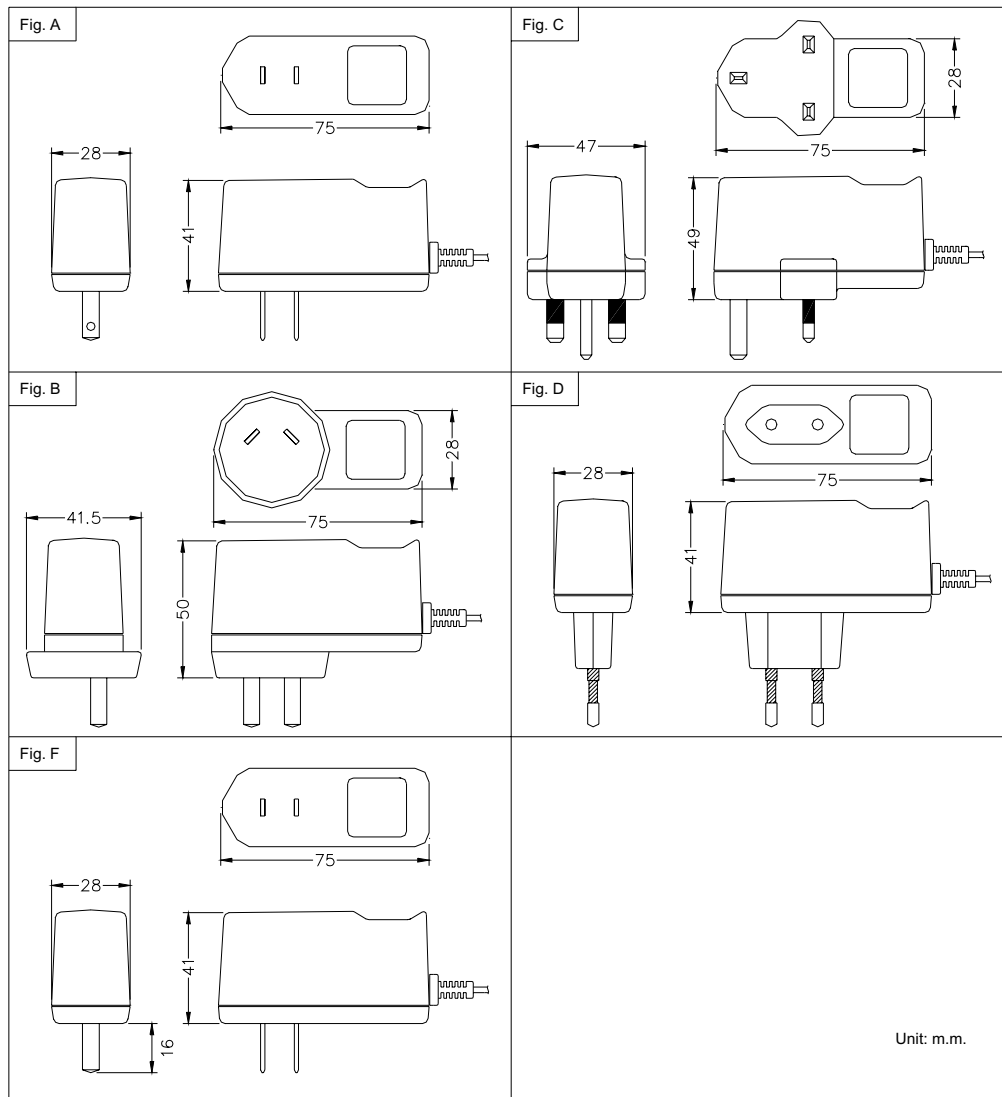

Standard Output Cable:
3.3V~3.6V: 18AWG, UL SPT-1, 1800mm.
4V~12V: 20AWG, UL 2468, 1800mm.



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>