

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 90g only
- Constant Current For Cell Phone
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



SPECIFICATION

Model		SA01-3US05~07	SA01-6US05~07
Item			
Output Voltage		+5V~7V	+5V~7V
Output Rating		3W Max	6W Max
Input Voltage		AC 90~264V	
Input Frequency		47~63Hz	
Input Current		0.2A Maximum	
Inrush Current		30A Maximum	
Line Regulation		2% Maximum	
Load Regulation		±5%	
Ripple & Noise		1% Maximum	
Efficiency		60% Typical	66% Typical
Temperature Coefficient		0.05%/°C	
Over-Voltage Protection		150% Maximum	
Operating Temperature		0~40°C	
Storage Temperature		-20~85°C	
Safety Description	Fig. A	UL, CUL, PSE, CB, LPS, CE, BSMI	UL, CUL, PSE, CB, LPS, CE, BSMI
	Fig. B	CB, LPS, CE, BSMI	CB, LPS, CE, BSMI
	Fig. C	CB, LPS, CE, BSMI	CB, LPS, CE, BSMI
	Fig. D	TUV, CB, LPS, CE, BSMI	TUV, CB, LPS, CE, BSMI
	Fig. F	CB, LPS, CE, BSMI	CB, LPS, CE, BSMI

(*) : Under Development (I/P) : In Process

Above specification is for reference only, please contact for details.

Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>

ORDERING INFORMATION

SA01-3 US 05 C-A-1 A

Output plug List


Mechanical

Constant Current or Blank

Output Voltage

Output Wattage

MECHANICAL

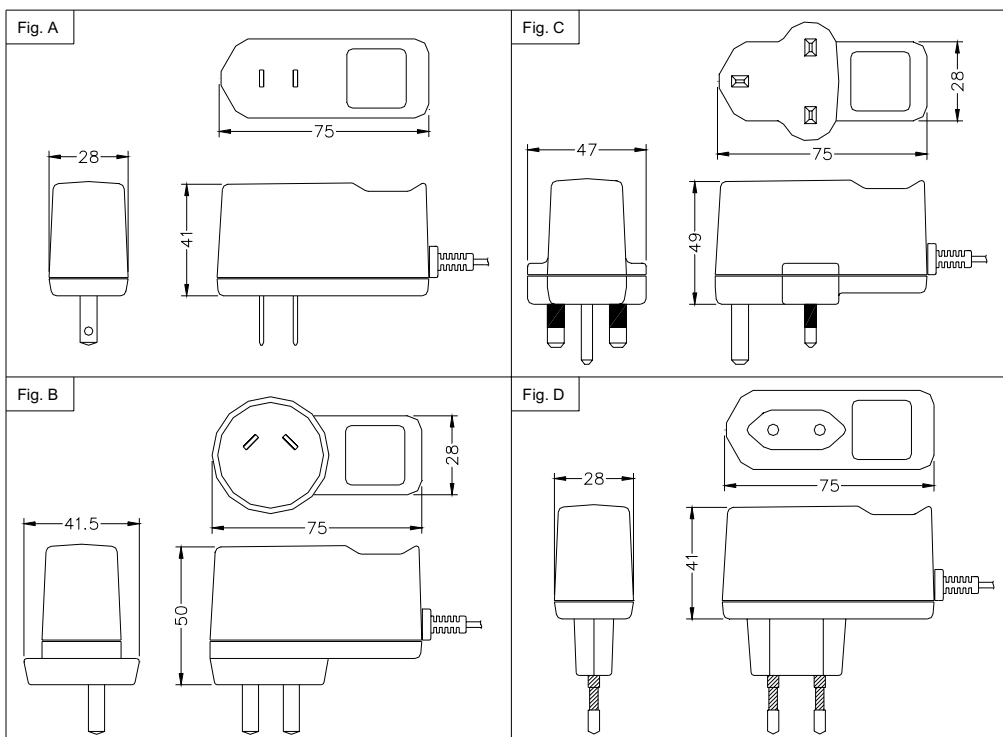

Unit: m.m.

Standard Output Cable:
 3W: 22AWG, UL 2468, 1800mm.
 6W: 20AWG, UL 2468, 1800mm.



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>