

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 210g only
- Efficiency Over 75%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0 ~40



SPECIFICATION

Model		SA06L48
Item		
Output Voltage		+48V
Output Rating		0.4A
Input Voltage		AC 90~264V
Input Frequency		47~63Hz
Input Current		0.5A Maximum
Inrush Current		40A Maximum
Line Regulation		2% Maximum
Load Regulation		±5%
Ripple & Noise		1% Typical
Efficiency		83% Typical
Temperature Coefficient		0.05%/
Over-Voltage Protection		96V Maximum
Operating Temperature		0~40
Storage Temperature		-20~85
Safety Description	Fig. U	---
	Fig. V	UL, CUL, TUV, C-TICK, BSMI, PSE, CCC
	Fig. W	DOIR, CB

(*) : Under Development (I/P) : In Process

Above specification is for reference only, please contact for details.


ORDERING INFORMATION

SA06L48 - V - 1 A

Output Plug List

Mechanical

MECHANICAL

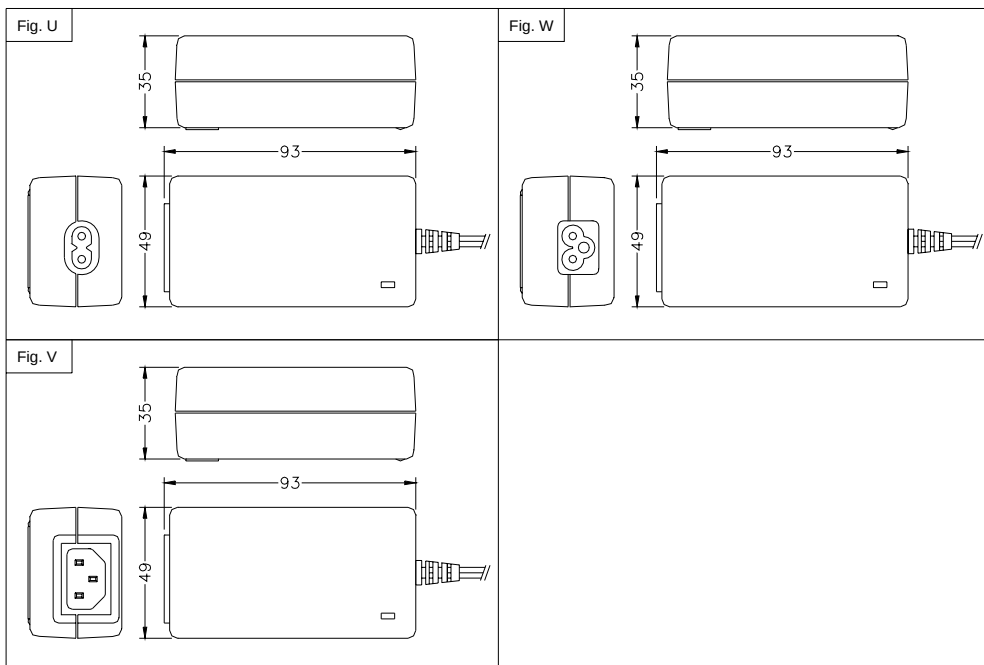

Unit: m.m.

Standard Output Cable:
20AWG, UL 2468, 1800mm



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>