

FEATURES

- Special AC Plug Design (For Reduce Stock)
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 150g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0 ~40



SPECIFICATION

Model	SA073V3	SA0705~07	SA0708~10	SA0711~13
Item				
Output Voltage	+3.3V	+5V~7V	+8V~10V	+11V~13V
Output Rating	2.0A	10W Max	10W Max	15W Max
Input Voltage	AC 90~264V			
Input Frequency	47~63Hz			
Input Current	0.5A Maximum			
Inrush Current	40A Maximum			
Line Regulation	2% Maximum			
Load Regulation	±5%			
Ripple & Noise	1% Typical			
Efficiency	68%~79% Typical			
Temperature Coefficient	0.05%/			
Over-Voltage Protection	7V~26V Maximum			
Operating Temperature	0~40			
Storage Temperature	-20~85			
Safety Description	Fig. A	UL, CUL, CB, LPS, BSMI, CE, FCC, PSE		
	Fig. B	C-TICK, CB, LPS, BSMI, CE		
	Fig. C	BSI, CB, LPS, BSMI, CE		
	Fig. D	TUV, CB, LPS, BSMI, CE		

(*): Under Development (I/P): In Process

Above specification is for reference only, please contact for details.

ORDERING INFORMATION


SA07 **05** - **A** - **1** **A**

Output Plug List

Mechanical

Output Voltage

MECHANICAL

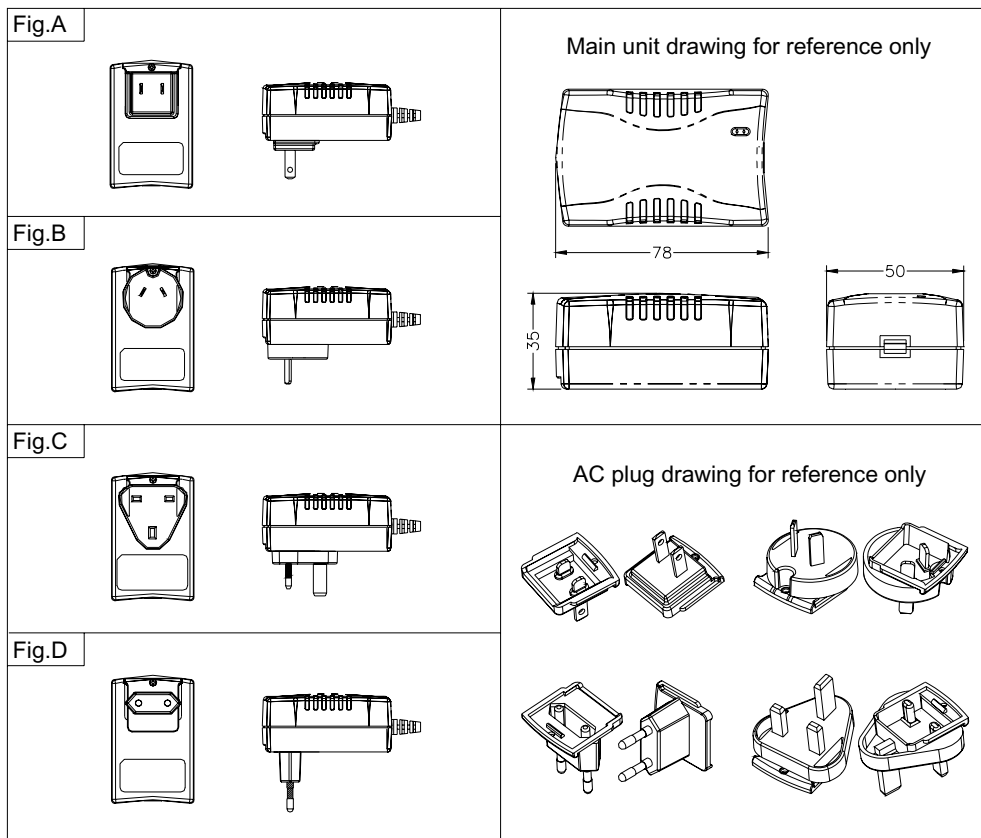

Unit: m.m.

Standard Output Cable:
 3.3V~5V: 18AWG, UL SPT-1, 1800mm.
 6V~12V: 20AWG, UL 2468, 1800mm.



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>