

FEATURES

- Special AC Plug Design (For Reduce Stock)
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 220g only
- Efficiency Over 83%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0 ~40



SPECIFICATION

Item	Model	
	SA07H12~17	SA07H17~24
Output Voltage	12V~17V	17V~24V
Output Rating	24W Max	24W Max
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	0.8A Maximum	
Inrush Current	60A Maximum	
Line Regulation	2% Maximum	
Load Regulation	±5%	
Ripple & Noise	1% Maximum	
Efficiency	83% Typical	84% Typical
Temperature Coefficient	0.05%/	
Over-Voltage Protection	24V~34V Maximum	34V~48V Maximum
Operating Temperature	0~40	
Storage Temperature	-20~85	
Safety Description	Fig. A	UL, CUL, CB, BSMI, LPS, CE, PSE (< 15V)
	Fig. B	CB, BSMI, LPS, CE
	Fig. C	BSI, CB, BSMI, LPS, CE
	Fig. D	TUV, CB, BSMI, LPS, CE

(*): Under Development (I/P): In Process

Above specification is for reference only, please contact for details.

ORDERING INFORMATION


SA07H 1 2 - A - 1 A

Output Plug List

Mechanical

Output Voltage

MECHANICAL

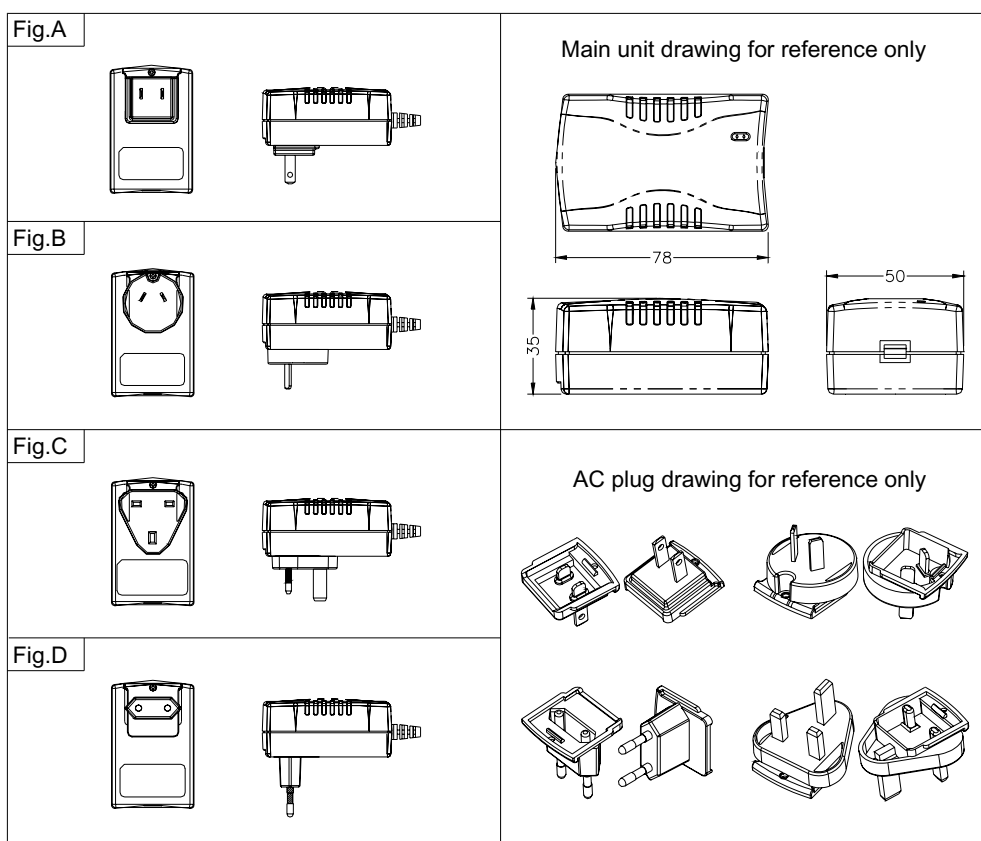

Unit: m.m.

Standard Output Cable:
20AWG, UL 2468, 1800mm



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>