

FEATURES

- Special AC Plug Design (For Reduce Stock)
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 150g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



SPECIFICATION

Model		SA07L04~07
Item		
Output Voltage		+4V~7V
Output Rating		6W Max
Input Voltage		AC 90~264V
Input Frequency		47~63Hz
Input Current		0.3A Maximum
Inrush Current		30A Maximum
Line Regulation		2% Maximum
Load Regulation		±5%
Ripple & Noise		1% Typical
Efficiency		67% Typical
Temperature Coefficient		0.05%/°C
Over-Voltage Protection		8V~14V Maximum
Operating Temperature		0~40°C
Storage Temperature		-20~85°C
Safety Description	Fig. A	UL, CUL, CB, LPS, BSMI, CE, PSE
	Fig. B	C-TICK, CB, LPS, BSMI, CE
	Fig. C	BSI, CB, LPS, BSMI, CE
	Fig. D	TUV, CB, LPS, BSMI, CE

(*) : Under Development (I/P) : In Process

Above specification is for reference only, please contact for details.

ORDERING INFORMATION


SA07L 05 - A - 1 A

Output Plug List

Mechanical

Output Voltage

MECHANICAL

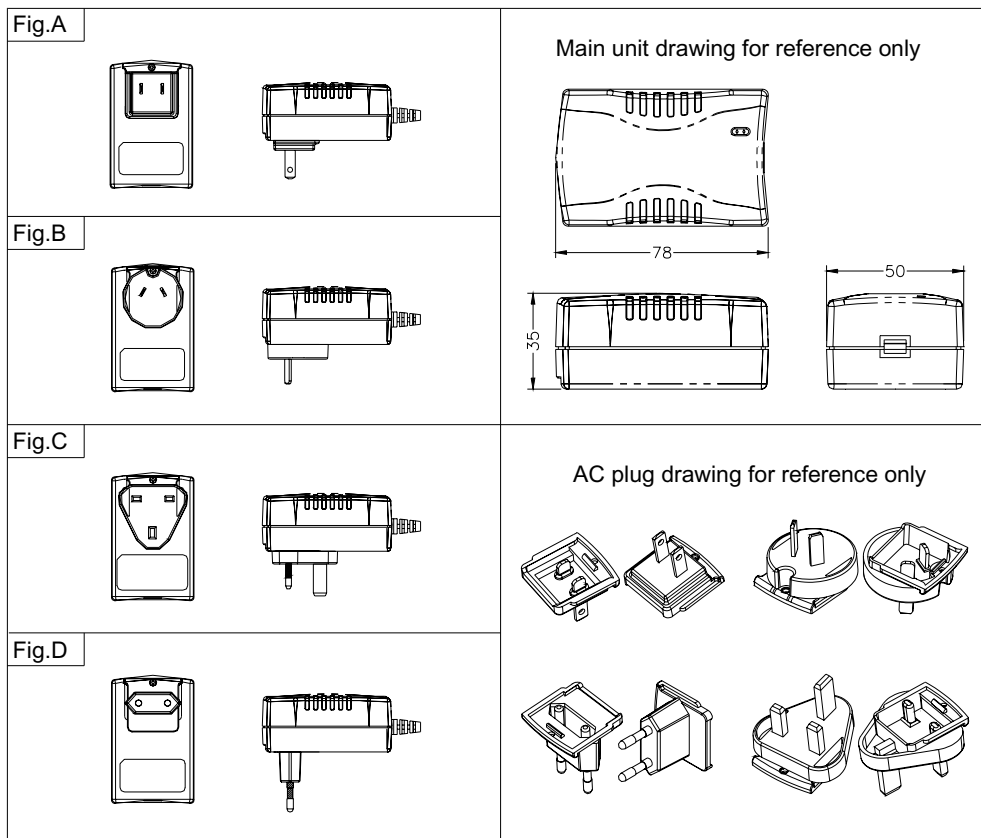

Unit: m.m.

Standard Output Cable:
20AWG, UL 2468, 1800mm



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>