

FEATURES

- Special AC Plug Design (For Reduce Stock)
- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 170g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0 ~40



SPECIFICATION

Model	SA07M05~07	* SA07M07~09	* SA07M09~12	* SA07M12~17	* SA07M17~24
Item	SA07M05~07	* SA07M07~09	* SA07M09~12	* SA07M12~17	* SA07M17~24
Output Voltage	+5V~7V	+7V~9V	+9V~12V	+12V~17V	+17V~24V
Output Rating	14W Max	14W Max	19W Max	19W Max	19W Max
Input Voltage	AC 90~264V				
Input Frequency	47~63Hz				
Input Current	0.6A Maximum				
Inrush Current	40A Maximum				
Line Regulation	2% Maximum				
Load Regulation	±5%				
Ripple & Noise	1% Typical				
Efficiency	72% Typical	72% Typical	76% Typical	76% Typical	77% Typical
Temperature Coefficient	0.05%/				
Over-Voltage Protection	10V~48V Maximum				
Operating Temperature	0~40				
Storage Temperature	-20~85				
Safety Description	Fig. A	UL, CUL, CB, BSMI, LPS, CE, FCC, PSE	---	---	---
	Fig. B	CB, BSMI, LPS, CE	---	---	---
	Fig. C	BSI, CB, BSMI, LPS, CE	---	---	---
	Fig. D	TUV, CB, BSMI, LPS, CE	---	---	---

(*): Under Development (I/P): In Process

Above specification is for reference only, please contact for details.

ORDERING INFORMATION


SA07M 05 - A - 1 A

Output Plug List

Mechanical

Output Voltage

MECHANICAL

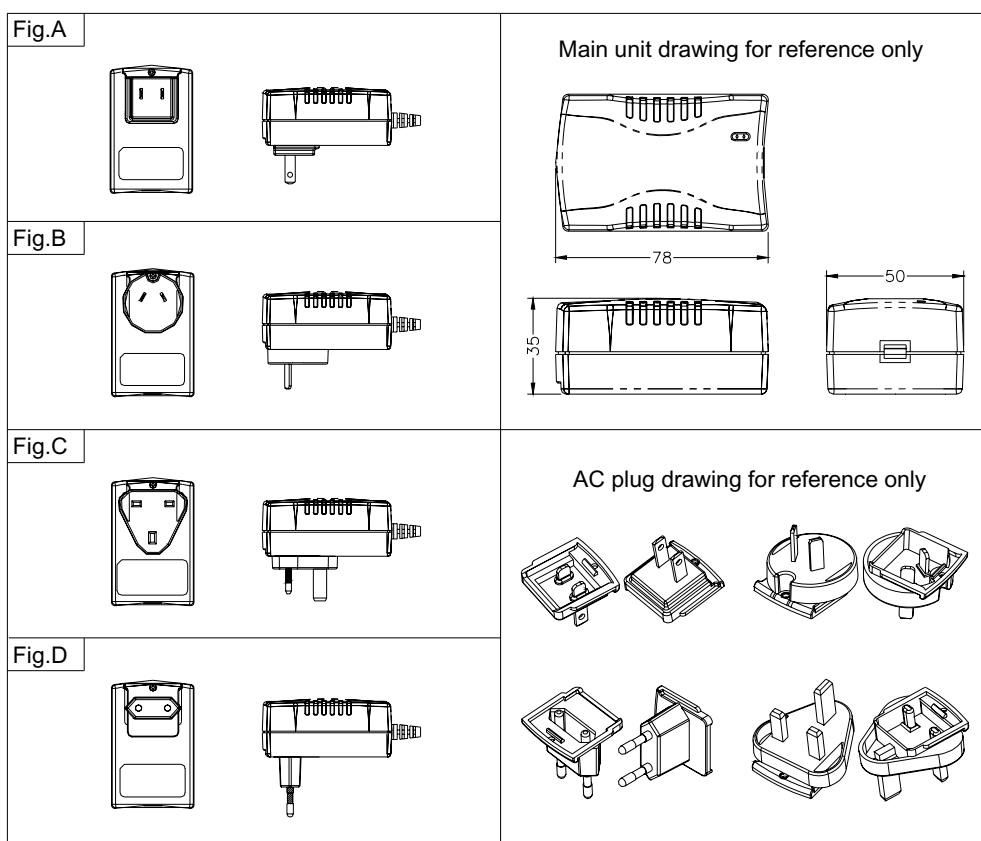

Unit: m.m.

Standard Output Cable:
 5V~7V: 18AWG, UL SPT-1, 1800mm.
 12V~24V: 20AWG, UL 2468, 1800mm.



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>