

FEATURES

- Low Cost
- 90-264Vac Universal Input
- CISPR'B' & CNS'B' Compliance
- 100% Burn-In Test
- Over Voltage Protection Installation
- Short-Circuit Protection Installation
- Protection Type: Auto-Recovery

SPECIFICATION




Model	SP20108
Item	
Input Voltage	AC 90~264V
Input Frequency	47~63Hz
Efficiency	70% Typical
Operating Temperature	0~50°C
Storage Temperature	-20~85°C
Weight	55g
Safety Description	UL, CUL, TUV

(*) : Under Development

(I/P) : In Process

MECHANICAL

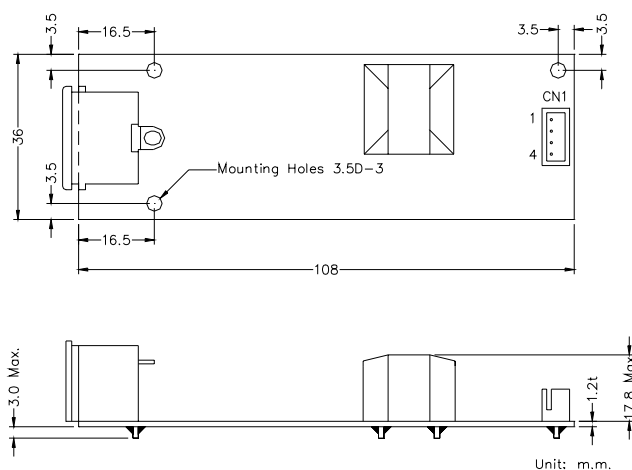

Ref. No.	Connector Type	Mating Connector Type
INLET	IEC-320 Socket	IEC-320 AC Power Cord
CN1	JST B4B-XH-A or Equivalent	JST XHP-4 or Equivalent

Pin Assignment CN1	
Pin 1	+3.3V
Pin 2	+3.3V
Pin 3	GND
Pin 4	GND

OUTPUTS

Model No.	SP20108	
Vo	+3.3V	
Load	Min	0A
	Rated	2A
	Surge	---
Regulation	Line	1%
	Load	3%
Tolerance	+/-4%	
Ripple Noise	50mV	



Touch Electronic Co., Ltd.