


FEATURES

- Book-Size PC.
- Remote-Control Function
- Stand-By Output Provide
- High Efficiency (70%Typ.)
- 90-264Vac Universal Input
- CISPR'B' & CNS'B' Compliance
- Short-Circuit Protection, OVP Installation

SPECIFICATION

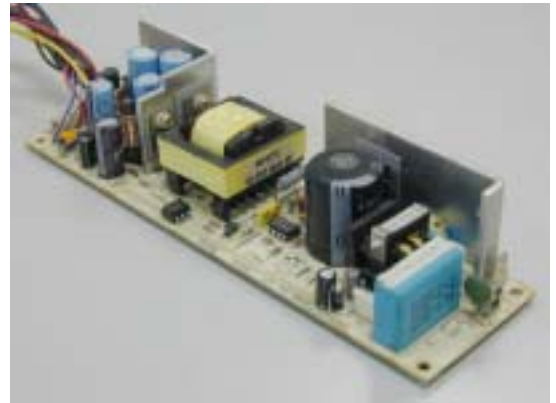


Model	SP9716	SP9716A
Item		
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Efficiency	73% Typical	74% Typical
Operating Temperature	0~50	
Storage Temperature	-20~85	
Weight	320g	
Safety Description	UL, CUL, TUV, CB	

(*) : Under Development

(I/P): In Process

MECHANICAL

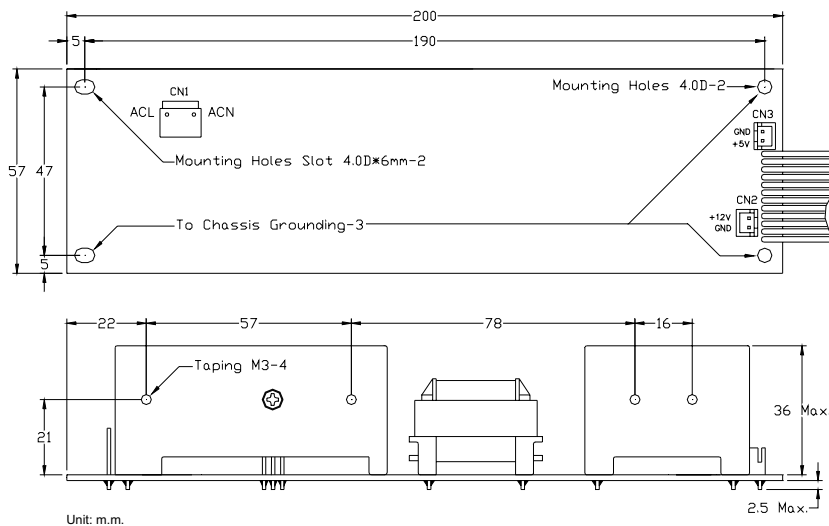

Ref. No.	Connector Type
CN1	JST B3P2-VH or Equivalent
CN2, CN3	JST B2B-XH-A or Equivalent

OUTPUTS

Model No.		SP9716				SP9716A		
Vo (V)		Vo1	Vo2	Vo3	Vo4	Vo1	Vo2	Vo3
		+5	+12	-12	5sb	+5	+12	-12
Load (A)	Min	2.5	0.5	0.1	0	2.5	0.5	0.1
	Max	10	2.2	0.3	0.85	10	2.2	0.3
Regulation (%)	Line	1	1	1	1	1	1	1
	Load	5	8	10	5	5	8	10
Tolerance (+/- %)		5	5	10	5	5	5	10
Ripple/Noise (mV)		50	120	200	50	50	120	200