

FEATURES

- Low Cost
- 90-264Vac Universal Input
- CISPR'B' & CNS'B' Compliance
- 100% Burn-In Test
- Over Voltage Protection Installation
- Short-Circuit Protection Installation
- Protection Type: Auto-Recovery

SPECIFICATION




Model	SP9801
Item	
Input Voltage	AC 90~264V
Input Frequency	47~63Hz
Efficiency	70% Typical
Operating Temperature	0~50°C
Storage Temperature	-20~85°C
Weight	140g
Safety Description	UL, CUL, TUV

(*) : Under Development

(I/P) : In Process

MECHANICAL

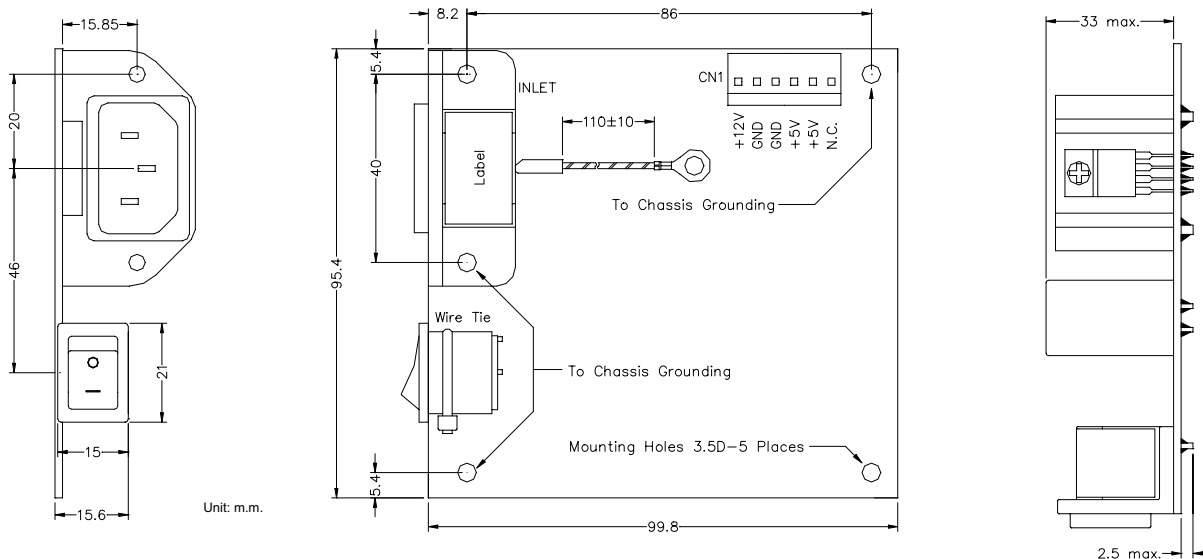

OUTPUTS

Model No.	Vo	Load			Regulation		Tolerance	Ripple & Noise
		Min.	Rated	Surge	Line	Load		
SP9801	Vo1 +5V	0.5A	1.4A	---	1.0%	4.0%	± 5.0%	50mV
	Vo2 +12V	0.2A	0.65A	---	1.0%	7.0%	+9/-5%	120mV

Ref. No.	Connector Type	Mating Connector Type
INLET	IEC-320 Socket INALWAYS 0714 or Equ.	IEC-320 AC Power Cord
CN1	TKP P-8800I or Equivalent	TKP H8800 or Equivalent