

FEATURES

- Hub Standard 3"x6" Size.
- 90-264Vac Universal Input
- CISPR'B' Compliance
- 100% Burn-In Test
- Over Voltage Protection Installation
- Short-Circuit Protection Installation
- Protection Type: Auto-Recovery

SPECIFICATION




Item	Model	SP9908
Input Voltage		AC 90~264V
Input Frequency		47~63Hz
Efficiency		68% Typical
Operating Temperature		0~40°C
Storage Temperature		-20~85°C
Weight		230g/8.1oz
Safety Description		UL, CUL, TUV, CCIB

(*) : Under Development

(I/P) : In Process

MECHANICAL

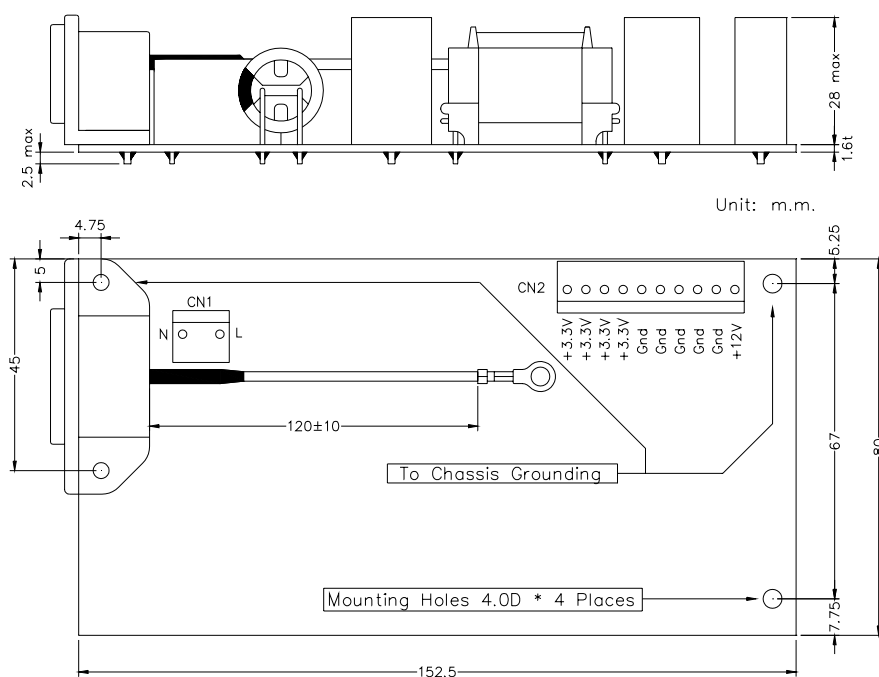

OUTPUTS

Model No.		SP9908	
Vo		Vo1	Vo2
		+3.3V	+12V
Load	Min	3A	0A
	Rated	10A	0.5A
	Surge	---	---
Regulation	Line	1%	1%
	Load	3%	10%
Tolerance		+/-5%	+/-10%
Ripple Noise		50mV	180mV

Ref. No.	Connector Type	Mating Connector Type
INLET	IEC-320 Socket	IEC-320 AC Power Cord
CN1	TKP P-8800I or Equivalent	TKP H8800 or Equivalent
CN2	TKP P-8800I or Equivalent	TKP H8800 or Equivalent