

FEATURES

- Industry Standard 3"x5" Size.
- 90-264Vac Universal Input
- CISPR'B' Compliance
- 100% Burn-In Test
- Over Voltage Protection Installation
- Short-Circuit Protection Installation
- Protection Type: Auto-Recovery

SPECIFICATION




Model	SP9909	SP9909A
Item		
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Efficiency	65% Typical	69% Typical
Operating Temperature	0~50	
Storage Temperature	-20~85	
Weight	230g/8.1oz	
Safety Description	---	

(*): Under Development

(I/P): In Process

MECHANICAL

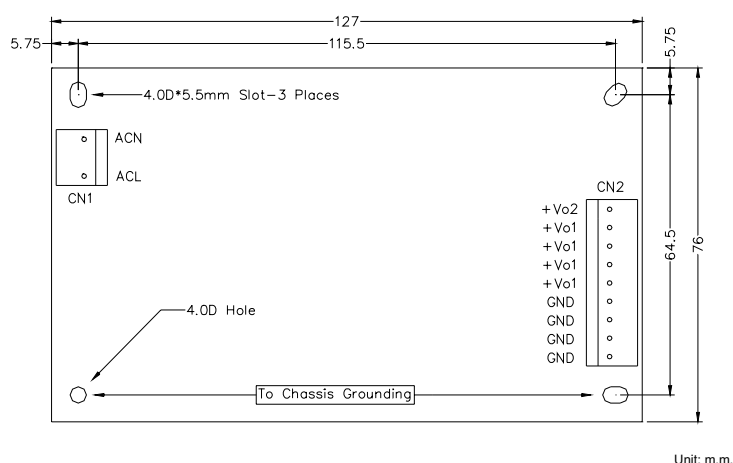

OUTPUTS

Model No.	SP9909		SP9909A	
Vo	Vo1	Vo2	Vo1	Vo2
	+3.3V	+5V	+5V	+12V
Load	Min	2A	0.3A	2A
	Rated	10A	1.5A	10A
	Surge	---	---	---
Regulation	Line	1%	1%	1%
	Load	3%	5%	3%
Tolerance	+/-5%	+/-5%	+/-5%	+/-5%
Ripple Noise	50mV	50mV	50mV	120mV

Ref. No.	Connector Type	Mating Connector Type
CN1	JST B3P2-VH or Equivalent	JST VHR-3N or Equivalent
CN2	JST B9P-VH or Equivalent	JST VHR-9N or Equivalent