

FEATURES

- Compact Size
- 90-264Vac Universal Input
- CISPR'B' & CNS'B' Compliance
- 100% Burn-In Test
- Over Voltage Protection Installation
- Short-Circuit Protection Installation
- Protection Type: Auto-Recovery

SPECIFICATION




Model	SP9920
Item	
Input Voltage	AC 90~264V
Input Frequency	47~63Hz
Efficiency	65% Typical
Operating Temperature	0~50°C
Storage Temperature	-20~85°C
Weight	75g (without AC Cord)
Safety Description	UL, CUL, S-Mark

(*) : Under Development

(I/P) : In Process

MECHANICAL

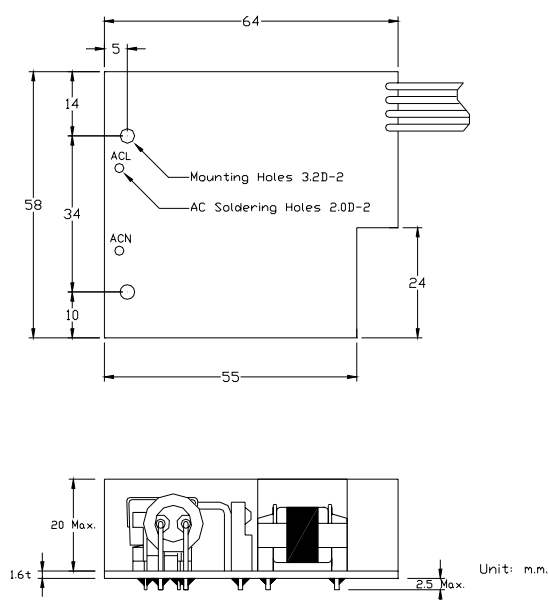

OUTPUTS

Model No.		SP9920
Vo		+3.3V
Load	Min	0A
	Rated	3A
	Surge	---
Regulation	Line	1%
	Load	3%
Tolerance		+/-3%
Ripple Noise		50mV



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161 e-mail: touch001@ms25.hinet.net <http://www.metouch.com>