

FEATURES

- Compact Size: (L)100*(W)58*(H)28mm
- Efficiency Over 82%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Standard Car Plug



SPECIFICATION

Item \ Model	ED1060-16~24
Output Voltage	+16V~24V
Output Current	3.5A Max or 60W Max
Input Voltage	DC 11~15.5V
Input Current	6.5A Maximum
Line Regulation	2% Maximum
Load Regulation	±5%
Ripple & Noise	1.5% Typical
Efficiency	85% Typical
Temperature Coefficient	0.05%/°C
Over-Voltage Protection	22V~32V Maximum
Operating Temperature	0~40°C
Storage Temperature	-20~85°C
Safety Description	CE

(*) : Under Development (I/P) : In Process

Above specification is for reference only, please contact for details.


ORDERING INFORMATION

ED1060 - 1 2 - 1 A

Output Plug List

Output Voltage

MECHANICAL

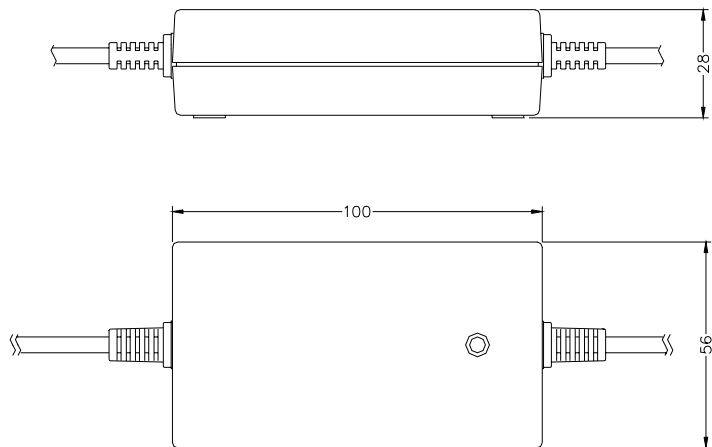

Unit: m.m.



Touch Electronic Co., Ltd.

Tel: 886-2-22675151 Fax: 886-2-22676161

Domestic Contact e-mail: touch001@ms25.hinet.net Overseas Contact e-mail: sales@metouch.com <http://www.metouch.com>